LOUIS BELET
Swiss Cutting tools

Ask for the full catalogue!

EXPERT TOOLS
TITANIUM

LOUIS BÉLET S.A.
Les Gasses 11
CH - 2943 Vendlincourt
www.louisbelet.ch

SWISS MADE

- Titanium
- Stainless steel
- Composite
- Brass
- Aluminium

LOUIS BELET
Swiss Cutting tools

EXPERT cutting tools recommended for machining titanium

Tool material : **SOLID CARBIDE**
Recommended Coating: **RICO**

Operation	Ref.	Picture	Page
Drilling	**353**		4
Milling	**3100**		7
Saw blades	**226**	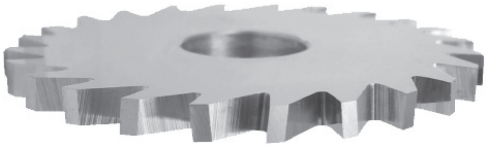	8
Threading	**5600**		10
Engraving	**119-2**		11
Special Custom tooling	**helical**		Upon request

This table presents only one optimal tool for each operation. You will find other tools suitable for titanium machining in our full catalogue.

Index - Titanium

N° Wsn	DIN	Gr.
Grades	1,2,3,4,7,11,12,13,14,15,16,17,26,27,30	a
Grades	5,6,9,10,18,19,20,21,22,23,24,25,28,29	b
3.7024	Ti99.8	a
3.7112	Ti5Al2,5Sn	a
3.7114	TiAl5Sn2	b
3.7124	TiCu2	b
3.7154	TiAl6Zr5	b
3.7165	TiAl6V4 (TA6V)	b
3.7174	TiAl6V6Sn2	b
3.7184	TiAl4Mo4Sn2	b
3.7144	TiAl6Sn2Zr4Mo2	b

353 Twist drill Z3 - shank Ø3

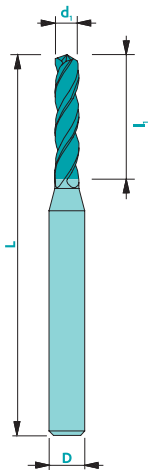

Material group (see page 3)	a	b
Recommended coating	-	-
V_c uncoated [m/min]	31	28
V_c coated [m/min]	36	34
F [mm]	Ø/120	Ø/120
Pecking	Øx1.2	Øx1.2

d_1: -0.002/-0.004
D: h5

Available
uncoated or coated

140° Z3

λ 34°

CARB

Art. n°	d_1	l_1	D	L
353d0.15	0.15	2.0	3.0	38
353d0.18	0.18	2.0	3.0	38
353d0.20	0.20	3.0	3.0	38
353d0.21	0.21	3.0	3.0	38
353d0.22	0.22	3.0	3.0	38
353d0.23	0.23	3.0	3.0	38
353d0.24	0.24	3.0	3.0	38
353d0.25	0.25	3.5	3.0	38
353d0.26	0.26	3.5	3.0	38
353d0.27	0.27	3.5	3.0	38
353d0.28	0.28	3.5	3.0	38
353d0.29	0.29	3.5	3.0	38
353d0.30	0.30	5.0	3.0	38
353d0.31	0.31	5.0	3.0	38
353d0.32	0.32	5.0	3.0	38
353d0.33	0.33	5.0	3.0	38
353d0.34	0.34	5.0	3.0	38
353d0.35	0.35	5.0	3.0	38
353d0.36	0.36	5.0	3.0	38
353d0.37	0.37	5.0	3.0	38
353d0.38	0.38	5.0	3.0	38
353d0.39	0.39	5.0	3.0	38
353d0.40	0.40	6.0	3.0	38
353d0.41	0.41	6.0	3.0	38
353d0.42	0.42	6.0	3.0	38
353d0.43	0.43	6.0	3.0	38
353d0.44	0.44	6.0	3.0	38
353d0.45	0.45	6.0	3.0	38
353d0.46	0.46	6.0	3.0	38

Art. n°	d_1	l_1	D	L
353d0.47	0.47	6.0	3.0	38
353d0.48	0.48	6.0	3.0	38
353d0.49	0.49	6.0	3.0	38
353d0.50	0.50	6.0	3.0	38
353d0.51	0.51	6.0	3.0	38
353d0.52	0.52	6.0	3.0	38
353d0.53	0.53	6.0	3.0	38
353d0.54	0.54	6.0	3.0	38
353d0.55	0.55	7.0	3.0	38
353d0.56	0.56	7.0	3.0	38
353d0.57	0.57	7.0	3.0	38
353d0.58	0.58	7.0	3.0	38
353d0.59	0.59	7.0	3.0	38
353d0.60	0.60	7.0	3.0	38
353d0.61	0.61	7.0	3.0	38
353d0.62	0.62	7.0	3.0	38
353d0.63	0.63	7.0	3.0	38
353d0.64	0.64	7.0	3.0	38
353d0.65	0.65	7.0	3.0	38
353d0.66	0.66	7.0	3.0	38
353d0.67	0.67	7.0	3.0	38
353d0.68	0.68	7.0	3.0	38
353d0.69	0.69	7.0	3.0	38
353d0.70	0.70	9.5	3.0	38
353d0.71	0.71	9.5	3.0	38
353d0.72	0.72	9.5	3.0	38
353d0.73	0.73	9.5	3.0	38
353d0.74	0.74	9.5	3.0	38
353d0.75	0.75	9.5	3.0	38

Formulas

$F = F_z \cdot Z$

$V_F = F_z \cdot Z \cdot n$

$n = \frac{V_c \cdot 1000}{\pi \cdot d_1}$

$V_c = \frac{\pi \cdot d_1 \cdot n}{1000}$

$f_z = \frac{V_f}{Z \cdot n}$

Caption

F [mm]:Feed per rotation

FZ [mm]: Feed per tooth

Z : Number of teeth

Vf [mm/min]: Feed speed

n : Spindle speed

Twist drill Z3 - shank Ø3

Art. n°	d_1	l_1	D	L
353d0.76	0.76	9.5	3.0	38
353d0.77	0.77	9.5	3.0	38
353d0.78	0.78	9.5	3.0	38
353d0.79	0.79	9.5	3.0	38
353d0.80	0.80	9.5	3.0	38
353d0.81	0.81	9.5	3.0	38
353d0.82	0.82	9.5	3.0	38
353d0.83	0.83	9.5	3.0	38
353d0.84	0.84	9.5	3.0	38
353d0.85	0.85	9.5	3.0	38
353d0.86	0.86	9.5	3.0	38
353d0.87	0.87	9.5	3.0	38
353d0.88	0.88	9.5	3.0	38
353d0.89	0.89	9.5	3.0	38
353d0.90	0.90	9.5	3.0	38
353d0.91	0.91	9.5	3.0	38
353d0.92	0.92	9.5	3.0	38
353d0.93	0.93	9.5	3.0	38
353d0.94	0.94	9.5	3.0	38
353d0.95	0.95	9.5	3.0	38
353d0.96	0.96	9.5	3.0	38
353d0.97	0.97	9.5	3.0	38
353d0.98	0.98	9.5	3.0	38
353d0.99	0.99	9.5	3.0	38
353d1.00	1.00	9.5	3.0	38
353d1.01	1.01	9.5	3.0	38
353d1.02	1.02	9.5	3.0	38
353d1.03	1.03	9.5	3.0	38
353d1.04	1.04	9.5	3.0	38
353d1.05	1.05	10.5	3.0	38
353d1.06	1.06	10.5	3.0	38
353d1.07	1.07	10.5	3.0	38
353d1.08	1.08	10.5	3.0	38
353d1.09	1.09	10.5	3.0	38
353d1.10	1.10	10.5	3.0	38
353d1.11	1.11	10.5	3.0	38
353d1.12	1.12	10.5	3.0	38
353d1.13	1.13	10.5	3.0	38
353d1.14	1.14	10.5	3.0	38
353d1.15	1.15	10.5	3.0	38
353d1.16	1.16	10.5	3.0	38
353d1.17	1.17	10.5	3.0	38
353d1.18	1.18	10.5	3.0	38
353d1.19	1.19	10.5	3.0	38
353d1.20	1.20	10.5	3.0	38
353d1.21	1.21	10.5	3.0	38
353d1.22	1.22	10.5	3.0	38
353d1.23	1.23	10.5	3.0	38
353d1.24	1.24	10.5	3.0	38
353d1.25	1.25	10.5	3.0	38
353d1.26	1.26	10.5	3.0	38
353d1.27	1.27	10.5	3.0	38
353d1.28	1.28	10.5	3.0	38
353d1.29	1.29	10.5	3.0	38
353d1.30	1.30	10.5	3.0	38
353d1.31	1.31	10.5	3.0	38
353d1.32	1.32	10.5	3.0	38
353d1.33	1.33	10.5	3.0	38
353d1.34	1.34	10.5	3.0	38
353d1.35	1.35	10.5	3.0	38
353d1.36	1.36	10.5	3.0	38
353d1.37	1.37	10.5	3.0	38
353d1.38	1.38	10.5	3.0	38
353d1.39	1.39	10.5	3.0	38
353d1.40	1.40	10.5	3.0	38
353d1.41	1.41	10.5	3.0	38
353d1.42	1.42	10.5	3.0	38
353d1.43	1.43	10.5	3.0	38
353d1.44	1.44	10.5	3.0	38
353d1.45	1.45	10.5	3.0	38
353d1.46	1.46	10.5	3.0	38
353d1.47	1.47	10.5	3.0	38
353d1.48	1.48	10.5	3.0	38
353d1.49	1.49	10.5	3.0	38
353d1.50	1.50	10.5	3.0	38
353d1.51	1.51	10.5	3.0	38
353d1.52	1.52	10.5	3.0	38
353d1.53	1.53	10.5	3.0	38
353d1.54	1.54	10.5	3.0	38
353d1.55	1.55	10.5	3.0	38
353d1.56	1.56	10.5	3.0	38
353d1.57	1.57	10.5	3.0	38
353d1.58	1.58	10.5	3.0	38
353d1.59	1.59	10.5	3.0	38
353d1.60	1.60	10.5	3.0	38
353d1.61	1.61	10.5	3.0	38
353d1.62	1.62	10.5	3.0	38

Available uncoated or coated

140°

Z3

λ 34°

CARB

Twist drill Z3 - shank Ø3

Available
uncoated or coated

140°

Z3

λ
34°

CARB

Art. n°	d_1	l_1	D	L
353d1.63	1.63	10.5	3.0	38
353d1.64	1.64	10.5	3.0	38
353d1.65	1.65	10.5	3.0	38
353d1.66	1.66	10.5	3.0	38
353d1.67	1.67	10.5	3.0	38
353d1.68	1.68	10.5	3.0	38
353d1.69	1.69	10.5	3.0	38
353d1.70	1.70	10.5	3.0	38
353d1.71	1.71	10.5	3.0	38
353d1.72	1.72	10.5	3.0	38
353d1.73	1.73	10.5	3.0	38
353d1.74	1.74	10.5	3.0	38
353d1.75	1.75	10.5	3.0	38
353d1.76	1.76	10.5	3.0	38
353d1.77	1.77	10.5	3.0	38
353d1.78	1.78	10.5	3.0	38
353d1.79	1.79	10.5	3.0	38
353d1.80	1.80	10.5	3.0	38
353d1.81	1.81	10.5	3.0	38
353d1.82	1.82	10.5	3.0	38
353d1.83	1.83	10.5	3.0	38
353d1.84	1.84	10.5	3.0	38
353d1.85	1.85	10.5	3.0	38
353d1.86	1.86	10.5	3.0	38
353d1.87	1.87	10.5	3.0	38
353d1.88	1.88	10.5	3.0	38
353d1.89	1.89	10.5	3.0	38
353d1.90	1.90	10.5	3.0	38
353d1.91	1.91	10.5	3.0	38
353d1.92	1.92	10.5	3.0	38
353d1.93	1.93	10.5	3.0	38
353d1.94	1.94	10.5	3.0	38
353d1.95	1.95	10.5	3.0	38
353d1.96	1.96	10.5	3.0	38
353d1.97	1.97	10.5	3.0	38
353d1.98	1.98	10.5	3.0	38
353d1.99	1.99	10.5	3.0	38
353d2.00	2.00	10.5	3.0	38
353d2.05	2.05	10.5	3.0	38
353d2.10	2.10	10.5	3.0	38
353d2.15	2.15	10.5	3.0	38
353d2.20	2.20	10.5	3.0	38
353d2.25	2.25	10.5	3.0	38

Art. n°	d_1	l_1	D	L
353d2.30	2.30	10.5	3.0	38
353d2.35	2.35	10.5	3.0	38
353d2.40	2.40	10.5	3.0	38
353d2.45	2.45	10.5	3.0	38
353d2.50	2.50	10.5	3.0	38
353d2.55	2.55	10.5	3.0	38
353d2.60	2.60	10.5	3.0	38
353d2.65	2.65	10.5	3.0	38
353d2.70	2.70	10.5	3.0	38
353d2.75	2.75	10.5	3.0	38
353d2.80	2.80	10.5	3.0	38
353d2.85	2.85	10.5	3.0	38
353d2.90	2.90	10.5	3.0	38
353d2.95	2.95	10.5	3.0	38
353d3.00	3.00	10.5	3.0	38

EXPERT end mill titanium

Material group (see page 3)	a	b
Recommended coating	Rico	Rico
V_c uncoated [m/min]	70	90
V_c coated [m/min]	60	80
F_z Ø 0.25 [mm]	0.002	0.002
F_z Ø 0.50 [mm]	0.004	0.002
F_z Ø 1.00 [mm]	0.007	0.004
F_z Ø 2.00 [mm]	0.010	0.008
F_z Ø 4.00 [mm]	0.015	0.016
F_z Ø 6.00 [mm]	0.024	0.024
F_z Ø 8.00 [mm]	0.032	0.032
F_z Ø 10.00 [mm]	0.04	0.04
F_z Ø 12.00 [mm]	0.05	0.05
F_z Ø 16.00 [mm]	0.06	0.06
F_z Ø 20.00 [mm]	0.07	0.07

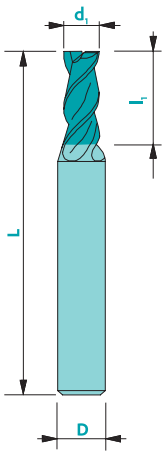

Available uncoated or coated

Tolerances

$d_1 \leq 1$ mm ▶ +0/-0.01
$d_1 > 1$ mm ▶ +0/-0.02
$d_1 = D$ ▶ d_1: e8

D: h5

Art. n°	d_1	l_1	D	L	Z
3100d0.50	0.5	1.0	6	57	3
3100d0.60	0.6	1.2	6	57	3
3100d0.70	0.7	1.4	6	57	3
3100d0.80	0.8	1.6	6	57	3
3100d0.90	0.9	1.8	6	57	3
3100d1.00	1.0	2.0	6	57	3
3100d1.10	1.1	2.2	6	57	3
3100d1.20	1.2	2.4	6	57	3
3100d1.30	1.3	2.6	6	57	3
3100d1.40	1.4	2.8	6	57	3
3100d1.50	1.5	3.0	6	57	3
3100d1.60	1.6	3.2	6	57	3
3100d1.70	1.7	3.4	6	57	3
3100d1.80	1.8	3.6	6	57	3
3100d1.90	1.9	3.8	6	57	3
3100d2.00	2.0	4.0	6	57	3
3100d2.10	2.1	4.2	6	57	3

Art. n°	d_1	l_1	D	L	Z
3100d2.20	2.2	4.4	6	57	3
3100d2.30	2.3	4.6	6	57	3
3100d2.40	2.4	4.8	6	57	3
3100d2.50	2.5	5.0	6	57	3
3100d2.60	2.6	5.2	6	57	3
3100d2.70	2.7	5.4	6	57	3
3100d2.80	2.8	5.6	6	57	3
3100d2.90	2.9	5.8	6	57	3
3100d3.00	3.0	6.0	6	57	3
3100d3.50	3.5	7.0	6	57	3
3100d4.00	4.0	8.0	6	57	3
3100d5.00	5.0	10.0	6	57	3
3100d6.00	6.0	12.0	8	63	3
3100d8.00	8.0	16.0	8	63	3
3100d10.00	10.0	20.0	10	72	4
3100d12.00	12.0	24.0	12	83	4

Z3-4

λ 45°

γ 8°

CARB

ap=1xd$_1$ ae=0.10xd$_1$ ap=1xd$_1$

Upon request



Formulas

$F = F_z \cdot Z$

$V_F = F_z \cdot Z \cdot n$

$n = \frac{V_c \cdot 1000}{\pi \cdot d_1}$

$V_c = \frac{\pi \cdot d_1 \cdot n}{1000}$

$f_z = \frac{V_f}{Z \cdot n}$

Caption

F [mm]:Feed per rotation

FZ [mm]: Feed per tooth

Z : Number of teeth

Vf [mm/min]: Feed speed

n : Spindle speed

Slitting saw staggered teeth

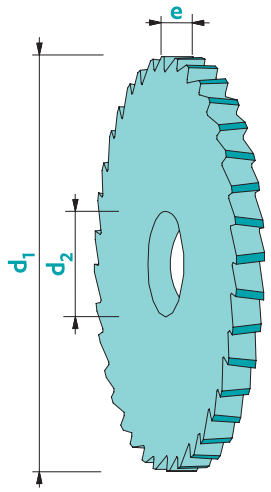

Material group (see page 3)	a	b
Recommended coating	Rico	Rico
V_c uncoated [m/min]	50	60
V_c coated [m/min]	40	50
F_z [mm]	Ø/10000	Ø/10000

Tolerance e: +0/-0.01
d_2: H5

Available
uncoated or coated

Z
12-36

λ
ALT

γ
8°

CARB

Art. n°	d_1	e	d_2	Z
226d15e1.5a5Z##	15	1.5	5	12 - 18
226d15e2.0a5Z##	15	2.0	5	12 - 18
226d15e2.5a5Z##	15	2.5	5	12 - 18
226d15e3.0a5Z##	15	3.0	5	12 - 18
226d15e3.5a5Z##	15	3.5	5	12 - 18
226d15e4.0a5Z##	15	4.0	5	12 - 18
226d15e4.5a5Z##	15	4.5	5	12 - 18
226d15e5.0a5Z##	15	5.0	5	12 - 18
226d15e5.5a5Z##	15	5.5	5	12 - 18
226d15e6.0a5Z##	15	6.0	5	12 - 18
226d20e1.5a5Z##	20	1.5	5	20 - 24
226d20e2.0a5Z##	20	2.0	5	20 - 24
226d20e2.5a5Z##	20	2.5	5	20 - 24
226d20e3.0a5Z##	20	3.0	5	20 - 24
226d20e3.5a5Z##	20	3.5	5	20 - 24
226d20e4.0a5Z##	20	4.0	5	20 - 24
226d20e4.5a5Z##	20	4.5	5	20 - 24
226d20e5.0a5Z##	20	5.0	5	20 - 24
226d20e5.5a5Z##	20	5.5	5	20 - 24
226d20e6.0a5Z##	20	6.0	5	20 - 24
226d25e1.5a8Z##	25	1.5	8	24 - 28
226d25e2.0a8Z##	25	2.0	8	24 - 28
226d25e2.5a8Z##	25	2.5	8	24 - 28
226d25e3.0a8Z##	25	3.0	8	24 - 28
226d25e3.5a8Z##	25	3.5	8	24 - 28
226d25e4.0a8Z##	25	4.0	8	24 - 28
226d25e4.5a8Z##	25	4.5	8	24 - 28
226d25e5.0a8Z##	25	5.0	8	24 - 28
226d25e5.5a8Z##	25	5.5	8	24 - 28

Art. n°	d_1	e	d_2	Z
226d25e6.0a8Z##	25	6.0	8	24 - 28
226d25e6.5a8Z##	25	6.5	8	24 - 28
226d25e7.0a8Z##	25	7.0	8	24 - 28
226d25e7.5a8Z##	25	7.5	8	24 - 28
226d25e8.0a8Z##	25	8.0	8	24 - 28
226d30e1.5a8Z##	30	1.5	8	24 - 28
226d30e2.0a8Z##	30	2.0	8	24 - 28
226d30e2.5a8Z##	30	2.5	8	24 - 28
226d30e3.0a8Z##	30	3.0	8	24 - 28
226d30e3.5a8Z##	30	3.5	8	24 - 28
226d30e4.0a8Z##	30	4.0	8	24 - 28
226d30e4.5a8Z##	30	4.5	8	24 - 28
226d30e5.0a8Z##	30	5.0	8	24 - 28
226d30e5.5a8Z##	30	5.5	8	24 - 28
226d30e6.0a8Z##	30	6.0	8	24 - 28
226d30e6.5a8Z##	30	6.5	8	24 - 28
226d30e7.0a8Z##	30	7.0	8	24 - 28
226d30e7.5a8Z##	30	7.5	8	24 - 28
226d30e8.0a8Z##	30	8.0	8	24 - 28
226d30e8.5a8Z##	30	8.5	8	24 - 28
226d30e9.0a8Z##	30	9.0	8	24 - 28
226d30e9.5a8Z##	30	9.5	8	24 - 28
226d30e10.0a8Z##	30	10.0	8	24 - 28
226d40e2.0a10Z##	40	2.0	10	28 - 32
226d40e2.5a10Z##	40	2.5	10	28 - 32
226d40e3.0a10Z##	40	3.0	10	28 - 32
226d40e3.5a10Z##	40	3.5	10	28 - 32
226d40e4.0a10Z##	40	4.0	10	28 - 32
226d40e4.5a10Z##	40	4.5	10	28 - 32

Formulas

$F = F_z \cdot Z$

$V_F = F_z \cdot Z \cdot n$

$n = \frac{V_c \cdot 1000}{\pi \cdot d_1}$

$V_c = \frac{\pi \cdot d_1 \cdot n}{1000}$

$f_z = \frac{V_f}{Z \cdot n}$

Caption

F [mm]:Feed per rotation
FZ [mm]: Feed per tooth
Z : Number of teeth
Vf [mm/min]: Feed speed
n : Spindle speed

Slitting saw staggered teeth

Art. n°	d_1	e	d_2	Z
226d40e5.0a10Z##	40	5.0	10	28 - 32
226d40e5.5a10Z##	40	5.5	10	28 - 32
226d40e6.0a10Z##	40	6.0	10	28 - 32
226d40e6.5a10Z##	40	6.5	10	28 - 32
226d40e7.0a10Z##	40	7.0	10	28 - 32
226d40e7.5a10Z##	40	7.5	10	28 - 32
226d40e8.0a10Z##	40	8.0	10	28 - 32
226d40e8.5a10Z##	40	8.5	10	28 - 32
226d40e9.0a10Z##	40	9.0	10	28 - 32
226d40e9.5a10Z##	40	9.5	10	28 - 32
226d40e10.0a10Z##	40	10.0	10	28 - 32
226d40e11.0a10Z##	40	11.0	10	28 - 32
226d40e12.0a10Z##	40	12.0	10	28 - 32
226d50e2.0a13Z##	50	2.0	13	28 - 32
226d50e2.5a13Z##	50	2.5	13	28 - 32
226d50e3.0a13Z##	50	3.0	13	28 - 32
226d50e3.5a13Z##	50	3.5	13	28 - 32
226d50e4.0a13Z##	50	4.0	13	28 - 32
226d50e4.5a13Z##	50	4.5	13	28 - 32
226d50e5.0a13Z##	50	5.0	13	28 - 32
226d50e5.5a13Z##	50	5.5	13	28 - 32
226d50e6.0a13Z##	50	6.0	13	28 - 32
226d50e6.5a13Z##	50	6.5	13	28 - 32
226d50e7.0a13Z##	50	7.0	13	28 - 32
226d50e7.5a13Z##	50	7.5	13	28 - 32
226d50e8.0a13Z##	50	8.0	13	28 - 32
226d50e8.5a13Z##	50	8.5	13	28 - 32
226d50e9.0a13Z##	50	9.0	13	28 - 32
226d50e9.5a13Z##	50	9.5	13	28 - 32
226d50e10.0a13Z##	50	10.0	13	28 - 32
226d50e11.0a13Z##	50	11.0	13	28 - 32
226d50e12.0a13Z##	50	12.0	13	28 - 32
226d63e2.0a16Z##	63	2.0	16	28 - 36
226d63e2.5a16Z##	63	2.5	16	28 - 36
226d63e3.0a16Z##	63	3.0	16	28 - 36
226d63e3.5a16Z##	63	3.5	16	28 - 36
226d63e4.0a16Z##	63	4.0	16	28 - 36
226d63e4.5a16Z##	63	4.5	16	28 - 36
226d63e5.0a16Z##	63	5.0	16	28 - 36
226d63e5.5a16Z##	63	5.5	16	28 - 36
226d63e6.0a16Z##	63	6.0	16	28 - 36
226d63e6.5a16Z##	63	6.5	16	28 - 36
226d63e7.0a16Z##	63	7.0	16	28 - 36
226d63e7.5a16Z##	63	7.5	16	28 - 36

Art. n°	d_1	e	d_2	Z
226d63e8.0a16Z##	63	8.0	16	28 - 36
226d63e8.5a16Z##	63	8.5	16	28 - 36
226d63e9.0a16Z##	63	9.0	16	28 - 36
226d63e10.0a16Z##	63	10.0	16	28 - 36
226d80e2.0a22Z##	80	2.0	22	28 - 36
226d80e2.5a22Z##	80	2.5	22	28 - 36
226d80e3.0a22Z##	80	3.0	22	28 - 36
226d80e3.5a22Z##	80	3.5	22	28 - 36
226d80e4.0a22Z##	80	4.0	22	28 - 36
226d80e4.5a22Z##	80	4.5	22	28 - 36
226d80e5.0a22Z##	80	5.0	22	28 - 36
226d80e5.5a22Z##	80	5.5	22	28 - 36
226d80e6.0a22Z##	80	6.0	22	28 - 36
226d80e6.5a22Z##	80	6.5	22	28 - 36
226d80e7.0a22Z##	80	7.0	22	28 - 36
226d80e7.5a22Z##	80	7.5	22	28 - 36
226d80e8.0a22Z##	80	8.0	22	28 - 36
226d80e8.5a22Z##	80	8.5	22	28 - 36
226d80e9.0a22Z##	80	9.0	22	28 - 36
226d80e9.5a22Z##	80	9.5	22	28 - 36
226d80e10.0a22Z##	80	10.0	22	28 - 36
226d80e11.0a22Z##	80	11.0	22	28 - 36
226d80e12.0a22Z##	80	12.0	22	28 - 36

Available uncoated or coated

Z
12-36

λ
ALT

γ
8°

CARB

5600 Whirling tools Z3 - NIHS norm 06-02 & 06-03

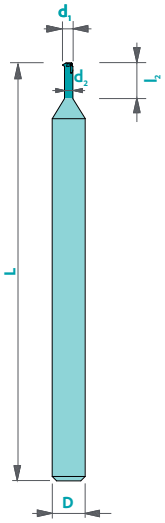

Material group (see page 3)	a	b
Recommended coating	Rico	Rico
V_c uncoated [m/min]	90	80
V_c coated [m/min]	110	100

Available uncoated or coated

Tolerances D: h5

Z3

CARB

Art. n°	Ø nominal	Pitch	d_1	l_2	d_2	D	L
5600S0.80	S0.80	0.200	0.60	2.00	0.38	3	38
5600S0.90	S0.90	0.225	0.68	2.25	0.43	3	38
5600S1.00	S1.00	0.250	0.76	2.50	0.48	3	38
5600S1.20	S1.20	0.250	0.94	2.50	0.66	3	38
5600S1.40	S1.40	0.300	1.10	3.00	0.76	3	38
5600M1.00	M1.00	0.250	0.76	2.50	0.48	3	38
5600M1.20	M1.20	0.250	0.94	2.50	0.66	3	38
5600M1.40	M1.40	0.300	1.10	3.00	0.76	3	38
5600M1.60	M1.60	0.350	1.25	3.50	0.85	3	38
5600M1.80	M1.80	0.350	1.45	3.50	1.05	3	38
5600M2.20	M2.20	0.450	1.70	4.50	1.19	3	38
5600M2.50	M2.50	0.450	2.00	5.00	1.49	3	38
5600M3.00	M3.00	0.500	2.40	4.50	1.84	3	38

Formulas

$F = F_z \cdot Z$

$V_F = F_z \cdot Z \cdot n$

$n = \frac{V_c \cdot 1000}{\pi \cdot d_1}$

$V_c = \frac{\pi \cdot d_1 \cdot n}{1000}$

$f_z = \frac{V_f}{Z \cdot n}$

Caption

F [mm]:Feed per rotation

FZ [mm]: Feed per tooth

Z : Number of teeth

Vf [mm/min]: Feed speed

n : Spindle speed

Helical engraving mill - flat tip

Material group (see page 3)	a	b
Recommended coating	Rico	Rico
n [rpm]	30'000	30'000
Fz↓ [mm]	0.003	0.003
Fz→ [mm]	0.0065	0.0065





Available uncoated or coated

Tolerances d_1: +/- 0.01
D: h5

Article number: 119-2a##d#.##
Example: End mill ref. 119-2 with 25° angle and tip diameter 0.05 mm: 119-2a25d0.05

α*	d_1**	D	L
15-45°	0.02-0.09	3	33
15-45°	0.10-0.30	3	33
50-140°	0.02-0.09	3	33
50-140°	0.10-0.30	3	33

* Available angles: every 5° between 15° and 45°; every 10° between 50° and 140°
** Available diameters: every 0.01 mm between 0.02 and 0.09 mm; every 0.05 mm between 0.10 and 0.30 mm

Other dimensions (angle, tip diameter, shank) upon request

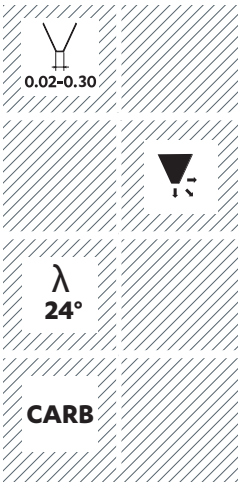

Formulas

$F = F_z \cdot Z$

$V_F = F_z \cdot Z \cdot n$

$n = \frac{V_c \cdot 1000}{\pi \cdot d_1}$

$V_c = \frac{\pi \cdot d_1 \cdot n}{1000}$

$f_z = \frac{V_f}{Z \cdot n}$

Caption

F [mm]:Feed per rotation
FZ [mm]: Feed per tooth
Z : Number of teeth
Vf [mm/min]: Feed speed
n : Spindle speed

Since 1948

Louis BELET SA is a family business of about 150 employees. The company is run by the two grandchildren of the founder, Mrs Roxane Piquerez and Mr Arnaud Maître.

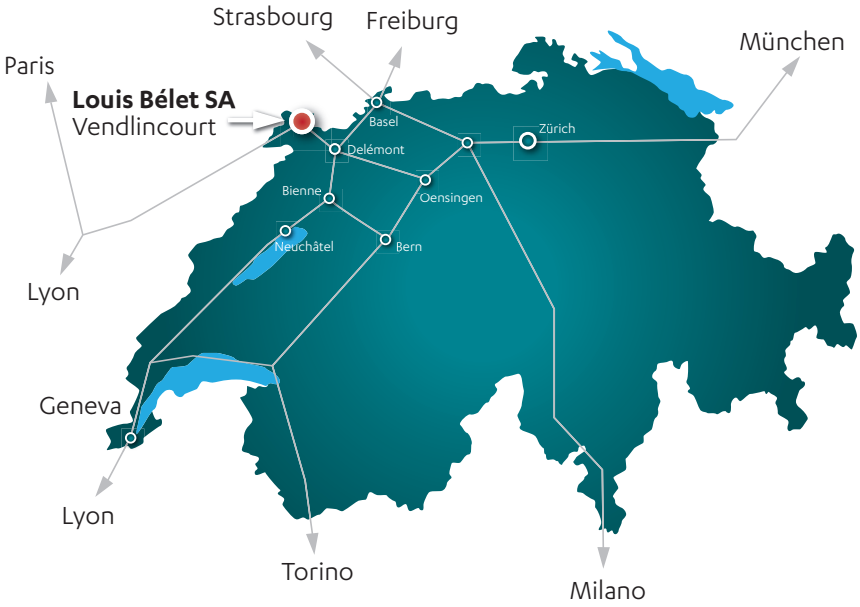

LOUIS BELET SA
Les Gasses 11
CH - 2943 Vendlincourt
Tél. +41 (0) 32 474 04 10
Fax +41 (0) 32 474 45 42
www.louisbelet.ch
info@louisbelet.ch

The quest of excellence

Bélet's spirit relies on the quest of excellence. In all our activities, we constantly focus on finding the best solutions, for our customers and our employees.

Quality and environmental management are testified by our ISO 9001:2008 and ISO 14001:2004 certifications.

List of authorized distributors available on www.louisbelet.ch

12.2021