


336H

EXPERT Pilotbohrer für nichtrostender Stahl mit Innenkühlung




Ø Bohrer	f [mm/tour]	Vc [m/min]
Ø 0.70 - Ø 0.99	0.012 - 0.030	70-90
Ø 1.00 - Ø 1.50	0.020 - 0.045	70-90
Ø 1.50 - Ø 2.00	0.030 - 0.060	70-90
Ø 2.00 - Ø 3.00	0.040 - 0.090	70-90

Toleranzen d_1 : +0.002/+0.004
D: h5

l_1 : +0.1/0

Öldruck in bar: **mindestens 50 bar**
Ölviskosität: **weniger als 15 mm²/s bei 40°C**
Filterfeinheit: **maximal 0,02 mm**

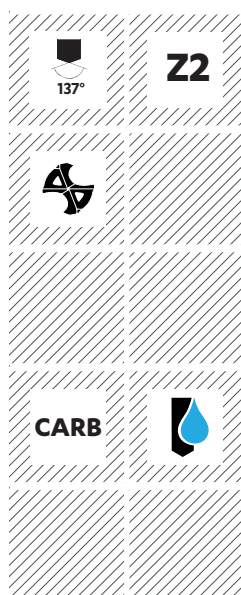

Art. n°	d ₁	l ₁	d ₂	l ₂	D	L	Art. n°	d ₁	l ₁	d ₂	l ₂	D	L
336Hd0.80BQ	0.80	2.00	1.50	4.9	3	50	336Hd1.10BQ	1.10	2.75	2.20	6.5	4	50
336Hd0.81BQ	0.81	2.03	1.50	4.9	3	50	336Hd1.11BQ	1.11	2.78	2.20	6.6	4	50
336Hd0.82BQ	0.82	2.05	1.50	5.0	3	50	336Hd1.12BQ	1.12	2.80	2.20	6.7	4	50
336Hd0.83BQ	0.83	2.08	1.50	5.1	3	50	336Hd1.13BQ	1.13	2.83	2.20	6.7	4	50
336Hd0.84BQ	0.84	2.10	1.50	5.1	3	50	336Hd1.14BQ	1.14	2.85	2.20	6.8	4	50
336Hd0.85BQ	0.85	2.13	1.50	5.2	3	50	336Hd1.15BQ	1.15	2.88	2.20	6.8	4	50
336Hd0.86BQ	0.86	2.15	1.60	5.2	3	50	336Hd1.16BQ	1.16	2.90	2.30	6.9	4	50
336Hd0.87BQ	0.87	2.18	1.60	5.3	3	50	336Hd1.17BQ	1.17	2.93	2.30	6.9	4	50
336Hd0.88BQ	0.88	2.20	1.60	5.3	3	50	336Hd1.18BQ	1.18	2.95	2.30	7.0	4	50
336Hd0.89BQ	0.89	2.23	1.60	5.4	3	50	336Hd1.19BQ	1.19	2.98	2.30	7.0	4	50
336Hd0.90BQ	0.90	2.25	1.60	5.4	3	50	336Hd1.20BQ	1.20	3.00	2.30	7.1	4	50
336Hd0.91BQ	0.91	2.28	1.65	5.5	3	50	336Hd1.21BQ	1.21	3.03	2.30	7.1	4	50
336Hd0.92BQ	0.92	2.30	1.70	5.6	3	50	336Hd1.22BQ	1.22	3.05	2.30	7.2	4	50
336Hd0.93BQ	0.93	2.33	1.75	5.6	3	50	336Hd1.23BQ	1.23	3.08	2.30	7.3	4	50
336Hd0.94BQ	0.94	2.35	1.80	5.7	3	50	336Hd1.24BQ	1.24	3.10	2.30	7.3	4	50
336Hd0.95BQ	0.95	2.38	1.85	5.7	3	50	336Hd1.25BQ	1.25	3.13	2.30	7.4	4	50
336Hd0.96BQ	0.96	2.40	1.90	5.8	3	50	336Hd1.26BQ	1.26	3.15	2.30	7.4	4	50
336Hd0.97BQ	0.97	2.43	1.95	5.8	3	50	336Hd1.27BQ	1.27	3.18	2.30	7.5	4	50
336Hd0.98BQ	0.98	2.45	2.00	5.9	3	50	336Hd1.28BQ	1.28	3.20	2.30	7.5	4	50
336Hd0.99BQ	0.99	2.48	2.00	6.0	3	50	336Hd1.29BQ	1.29	3.23	2.40	7.6	4	55
336Hd1.00BQ	1.00	2.50	2.00	6.0	3	50	336Hd1.30BQ	1.30	3.25	2.40	7.6	4	55
336Hd1.01BQ	1.01	2.53	2.05	6.1	3	50	336Hd1.31BQ	1.31	3.28	2.40	7.7	4	55
336Hd1.02BQ	1.02	2.55	2.10	6.1	3	50	336Hd1.32BQ	1.32	3.30	2.40	7.7	4	55
336Hd1.03BQ	1.03	2.58	2.15	6.2	3	50	336Hd1.33BQ	1.33	3.33	2.40	7.8	4	55
336Hd1.04BQ	1.04	2.60	2.20	6.2	3	50	336Hd1.34BQ	1.34	3.35	2.40	7.8	4	55
336Hd1.05BQ	1.05	2.63	2.20	6.3	3	50	336Hd1.35BQ	1.35	3.38	2.40	7.9	4	55
336Hd1.06BQ	1.06	2.65	2.20	6.3	3	50	336Hd1.36BQ	1.36	3.40	2.40	7.9	4	55
336Hd1.07BQ	1.07	2.68	2.20	6.4	3	50	336Hd1.37BQ	1.37	3.43	2.40	8.0	4	55
336Hd1.08BQ	1.08	2.70	2.20	6.4	3	50	336Hd1.38BQ	1.38	3.45	2.40	8.0	4	55
336Hd1.09BQ	1.09	2.73	2.20	6.5	3	50	336Hd1.39BQ	1.39	3.48	2.40	8.1	4	55

////CYCLON X




EXPERT Pilotbohrer für nichtrostender Stahl mit Innenkühlung

336H



Art. n°	d ₁	l ₁	d ₂	l ₂	D	L
336Hd1.40BQ	1.40	3.50	2.40	8.1	4	55
336Hd1.41BQ	1.41	3.53	2.40	8.2	4	55
336Hd1.42BQ	1.42	3.55	2.40	8.2	4	55
336Hd1.43BQ	1.43	3.58	2.40	8.3	4	55
336Hd1.44BQ	1.44	3.60	2.40	8.3	4	55
336Hd1.45BQ	1.45	3.63	2.40	8.4	4	55
336Hd1.46BQ	1.46	3.65	2.40	8.4	4	55
336Hd1.47BQ	1.47	3.68	2.40	8.5	4	55
336Hd1.48BQ	1.48	3.70	2.40	8.5	4	55
336Hd1.49BQ	1.49	3.73	2.40	8.6	4	55
336Hd1.50BQ	1.50	3.75	2.40	8.6	4	55
336Hd1.60BQ	1.60	4.00	2.50	9.1	4	57
336Hd1.65BQ	1.65	4.13	2.75	9.4	4	57
336Hd1.70BQ	1.70	4.25	2.90	9.6	4	57
336Hd1.75BQ	1.75	4.38	2.90	9.9	4	57
336Hd1.80BQ	1.80	4.50	3.00	10.1	4	57
336Hd1.85BQ	1.85	4.63	3.00	10.3	4	57
336Hd1.90BQ	1.90	4.75	3.00	10.5	4	57
336Hd2.00BQ	2.00	5.00	3.00	11.0	4	57
336Hd2.05BQ	2.05	5.13	3.00	11.2	4	57
336Hd2.50BQ	2.50	6.25	4.20	13.1	6	65
336Hd3.00BQ	3.00	7.50	5.00	15.0	6	65

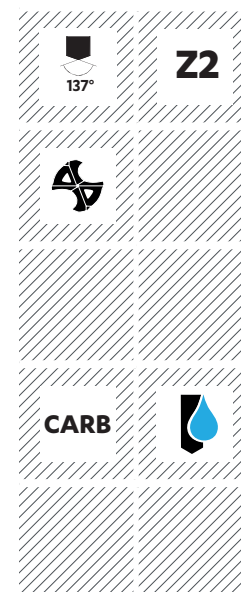

///CYCLON X