


Abwälzfräser für frontale Verzahnung

E₂F

Werkstoffe	Vc	Vc	Unbes- schichtet	beschichtet	Empfohlene Beschichtung *
	unbeschichtet	beschichtet			
Stahl 20AP	70	90	■	□	TRIO (PO)
Stahl Law 100X	70	90	■	□	TRIO (PO)
C-stahl (Finemac)	50	60	■	■	TRIO (PO)
4C27A	60	70	■	■	TRIO (PO)
CK45	80	90	■	■	TRIO (PO)
316L	60	70	■	■	TRIO (PO)
Andere Inox	60	70	■	■	TRIO (PO)
Bleihaltiges Messing	150	170	■	-	SOLO (DA)
Bleifreies Messing	150	170	■	□	SOLO (DA)
CuBe	100	120	■	□	SOLO (DA)
Neusilber (Maillechort)	120	140	■	□	SOLO (DA)
Bronze	120	140	■	□	SOLO (DA)
Aluminium	200	220	■	-	SOLO (DA)
Titan	80	90	■	-	-

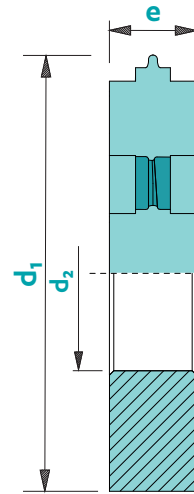

Toleranzen d_1 : H3 e : +0/-0.01

Standardmodule: 0.030 - 0.500. Weitere Module auf Anfrage

d_1	e	d_2	Z
6	2	3.5	2-5
8	2	3.5	2-5
10	2	3.5	2-5
10	2	4.5	2-5
12	2	4.5	2-5
12	2	5.0	2-5
12	2	6.0	2-5
16	2	8.0	2-5
18	2	6.0	2-5
18	2	8.0	2-5
24	2	8.0	2-5

Erhältlich unbeschichtet und beschichtet



Z2-5

λ
0°

γ
0°

CARB