


7339

Mikrobohrer Spiralwinkel 24° für 701S Maschine Willemin-Macodel

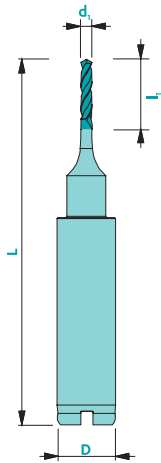

Werkstoffe	Vc	Vc	Unbes- chichtet	beschichtet	Empfohlene Beschichtung*
	unbeschichtet	beschichtet			
Stahl < 700 N/mm ²	60	70	□	■	Trio (PO)
Stahl > 700 N/mm ²	50	60	□	■	Trio (PO)
Nichtrostende Stähle	40	50	□	■	Trio (PO)
Gusseisen	30	40	□	■	Solo (DA)
Kupfer	50	60	□	■	Solo (DA)
Messing - Bronze	120	130	■	□	Solo (DA)
Aluminium	130	140	□	■	Nemo (NO)
Gold - Silber	80	90	■	□	Solo (DA)
Platin - Palladium	-	18	-	■	Solo (DA)
Superlegierungen	-	20	-	■	Trio (PO)
Titan	30	40	□	■	Nemo (NO)

nicht geeignet - geeignet □ sehr geeignet ■

Toleranzen d₁: -0.002/-0.004
D: h5

Erhältlich unbeschichtet und beschichtet



118°

Z2



λ
24°

CARB

Art. n°	d ₁	l ₁	D	L
7339d0.230	0.230	1.0	6	33
7339d0.275	0.275	1.0	6	33
7339d0.320	0.320	1.5	6	33
7339d0.400	0.400	2.0	6	33
7339d0.480	0.480	3.0	6	33
7339d0.560	0.560	4.0	6	33
7339d0.640	0.640	4.0	6	33
7339d0.720	0.720	4.0	6	33
7339d0.800	0.800	4.0	6	33
7339d1.000	1.000	4.0	6	33
7339d1.150	1.150	4.0	6	33