


41510

PCD Micro Helical Mill

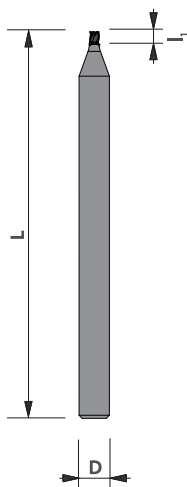

Material	Vc	Uncoated
Steel < 700 N/mm ²	-	-
Steel > 700 N/mm ²	-	-
Stainless steel	-	-
Cast iron	-	-
Copper	350	■
Brass - Bronze	500	■
Aluminium	1000	■
Gold - Silver	300	■
Platinum - Palladium	130	■
Superalloys	-	-
Titanium	-	-
Composite	200	□

Tolerances $D_1 < 1\text{mm} - 0/-0.01$ $D_1 > 1\text{mm} - 0/-0.02$ D: h5 not adapted - adapted □ highly adapted ■

Brut uniquement
Raw only - Nur rohe
Solo grezzo

Art. n°	d1	pitch	D	L	Z
41510d0.20	0.20	0.20	3	38	2
41510d0.30	0.30	0.30	3	38	2
41510d0.40	0.40	0.40	3	38	2
41510d0.50	0.50	0.50	3	38	3
41510d0.60	0.60	0.60	3	38	3
41510d0.70	0.70	0.70	3	38	3
41510d0.80	0.80	0.80	3	38	3
41510d0.90	0.90	0.90	3	38	3
41510d1.00	1.00	1.00	3	38	3
41510d1.10	1.10	1.10	3	38	3
41510d1.20	1.20	1.20	3	38	3
41510d1.30	1.30	1.30	3	38	3
41510d1.40	1.40	1.40	3	38	3
41510d1.50	1.50	1.50	3	38	3



PCD



Z2-3




8-10°



30°



ap=0.15xd1 ae=0.03xd1
ap=1xd1

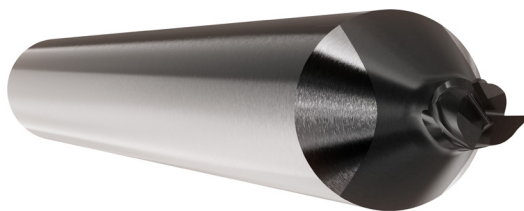

///EXCALIBUR