


## Duplex hob cutter on a shank

Material	Vc uncoated	Vc coated	Uncoated	Coated	Rec. Coating
Steel 20AP	70	90	■	□	TRIO (PO)
Steel Law 100X	70	90	■	□	TRIO (PO)
Carbon steel (Finemac)	50	60	■	■	TRIO (PO)
4C27A	60	70	■	■	TRIO (PO)
CK45	80	90	■	■	TRIO (PO)
316L	60	70	■	■	TRIO (PO)
Other stainless steel	60	70	■	■	TRIO (PO)
Leaded brass	150	170	■	-	SOLO (DA)
Lead-free brass	150	170	■	□	SOLO (DA)
CuBe (copper alloys)	100	120	■	□	SOLO (DA)
Nickel silver (Maillechort)	120	140	■	□	SOLO (DA)
Bronze	120	140	■	□	SOLO (DA)
Aluminium	200	220	■	-	SOLO (DA)
Titanium	80	90	■	-	-

not adapted - adapted □ highly adapted ■

Tolerances D : H5

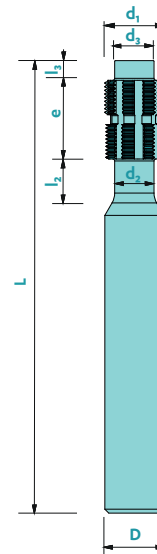

Standard modules: 0.015 - 0.800. Other modules upon request

$d_1$	$e$	$d_2$	$l_2$	$D$	$L$	$Z$	$d_3$	$l_3$
3.0	5	2.0	2	6	45	8	2.0	1
3.5	5	2.5	2	6	45	8	2.5	1
4.0	5	3.0	3	6	45	8	3.0	1
5.0	6	3.5	3	6	45	10	3.5	1
6.0	6	4.0	3	6	45	12	4.0	1
8.0	6	-	-	6	45	12	5.0	1
10.0	8	-	-	6	45	15	6.0	1
12.0	8	-	-	6	45	15	8.0	1
16.0	8	-	-	10	51	15	10.0	2
20.0	8	-	-	10	51	15	12.0	2

Available uncoated or coated



$Z$   
8-15



Topping

$\lambda$   
 $0^\circ$

$\gamma$   
 $0^\circ$

CARB



$m \geq$   
0.015

Option : No topping