


# Fraise circulaire isocèle 120°

# 229-3

Matière	Vc non rev.	Vc rev.	Brut	Revêtu	Rev. recommand.*
Acier < 700 N/mm <sup>2</sup>	64	96	□	■	Tisi (BQ)
Acier > 700 N/mm <sup>2</sup>	48	80	□	■	Tisi (BQ)
Acier inox	48	80	□	■	Tisi (BQ)
Fonte	40	72	□	■	Tisi (BQ)
Cuivre	160	240	□	■	Solo (DA)
Laiton - Bronze	160	240	■	□	Solo (DA)
Aluminium	200	320	□	■	Solo (DA)
Or - Argent	120	240	□	■	Solo (DA)
Platine - Palladium	-	-	-	-	-
Superaliages	16	32	□	■	Trio (PO)
Titane	32	48	■	■	Rico (ZB)

pas adapté - adapté □ très adapté ■

Tolérances e: +/-0.01  
d<sub>2</sub>: H5

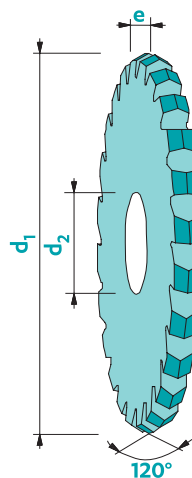

Art. n°	d <sub>1</sub>	e	d <sub>2</sub>	Z		
					Brut	Trio*
229-3d20e0.5	20	0.5	5	20	▲	▲
229-3d20e1.0	20	1.0	5	20	▲	▲
229-3d20e1.5	20	1.5	5	20	▲	▲
229-3d20e2.0	20	2.0	5	20	▲	▲
229-3d25e1.0	25	1.0	8	20	▲	▲
229-3d25e1.5	25	1.5	8	20	▲	▲
229-3d25e2.0	25	2.0	8	20	▲	▲
229-3d30e2.0	30	2.0	8	24	▲	▲
229-3d30e2.5	30	2.5	8	24	▲	▲
229-3d30e3.0	30	3.0	8	24	▲	▲
229-3d30e4.0	30	4.0	8	24	▲	▲
229-3d30e5.0	30	5.0	8	24	▲	▲
229-3d40e2.0	40	2.0	10	32	▲	▲
229-3d40e3.0	40	3.0	10	32	▲	▲
229-3d40e4.0	40	4.0	10	32	▲	▲
229-3d40e5.0	40	5.0	10	32	▲	▲
229-3d50e2.0	50	2.0	13	32	▲	▲
229-3d50e3.0	50	3.0	13	32	▲	▲
229-3d50e4.0	50	4.0	13	32	▲	▲
229-3d50e5.0	50	5.0	13	32	▲	▲
229-3d50e6.0	50	6.0	13	32	▲	▲
229-3d63e2.0	63	2.0	16	40	▲	▲
229-3d63e3.0	63	3.0	16	40	▲	▲
229-3d63e4.0	63	4.0	16	40	▲	▲
229-3d63e5.0	63	5.0	16	40	▲	▲
229-3d63e6.0	63	6.0	16	40	▲	▲
229-3d80e2.0	80	2.0	22	48	▲	▲
229-3d80e3.0	80	3.0	22	48	▲	▲
229-3d80e4.0	80	4.0	22	48	▲	▲
229-3d80e5.0	80	5.0	22	48	▲	▲
229-3d80e6.0	80	6.0	22	48	▲	▲

Disponible brut ou revêtu (voir page 308)

**Z**  
20-48

**λ**  
0°

**CARB**

\* Prix des autres revêtements : contactez-nous!  
Pour commander un outil revêtu, ajoutez le code à 2 lettres du revêtement au code article.