


Foret hélice 24° pour machine 701S

| Matière | Vc non rev. | Vc rev. | Brut | Revêtu | Rev. recommand. |
|-------------------------------|-------------|---------|------|--------|-----------------|
| Acier < 700 N/mm ² | 60 | 70 | □ | ■ | Trio |
| Acier > 700 N/mm ² | 50 | 60 | □ | ■ | Trio |
| Acier inox | 40 | 50 | □ | ■ | Trio |
| Fonte | 30 | 40 | □ | ■ | Solo |
| Cuivre | 50 | 60 | □ | ■ | Solo |
| Laiton - Bronze | 120 | 130 | ■ | □ | Solo |
| Aluminium | 130 | 140 | □ | ■ | Nemo |
| Or - Argent | 80 | 90 | ■ | □ | Solo |
| Platine - Palladium | - | 18 | - | ■ | Solo |
| Superalliages | - | 20 | - | ■ | Trio |
| Titane | 30 | 40 | □ | ■ | Nemo |

pas adapté - adapté □ très adapté ■

Tolerance d_1 : -0.002/-0.004
D: h5

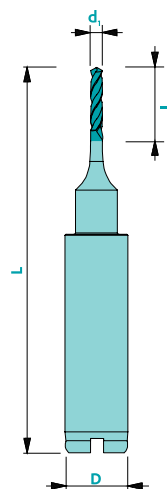

| Art. n° | d_1 | l_1 | D | L |
|------------|--------------|------------|---|----|
| 7339d0.230 | 0.230 | 1.0 | 6 | 33 |
| 7339d0.275 | 0.275 | 1.0 | 6 | 33 |
| 7339d0.320 | 0.320 | 1.5 | 6 | 33 |
| 7339d0.400 | 0.400 | 2.0 | 6 | 33 |
| 7339d0.480 | 0.480 | 3.0 | 6 | 33 |
| 7339d0.560 | 0.560 | 4.0 | 6 | 33 |
| 7339d0.640 | 0.640 | 4.0 | 6 | 33 |
| 7339d0.720 | 0.720 | 4.0 | 6 | 33 |
| 7339d0.800 | 0.800 | 4.0 | 6 | 33 |
| 7339d1.000 | 1.000 | 4.0 | 6 | 33 |
| 7339d1.150 | 1.150 | 4.0 | 6 | 33 |



118°

Z2



λ
24°

MG10

N