




PCD Fresa Micro Elicoidale

41520

Materiale	Vc	Senza rivestimento
Acciaio < 700 N/mm ²	-	-
Acciaio > 700 N/mm ²	-	-
Acciaio inox	-	-
Ghisa	-	-
Rame	350	■
Ottone - Bronzo	500	■
Alluminio	1000	■
Oro - argento	300	■
Platino - Palladio	130	■
Superleghe	-	-
Titanio	-	-
Compositi	200	□

Tolleranze $D_1 < 1\text{mm} - 0/-0.01$ $D_1 > 1\text{mm} - 0/-0.02$ D: h5 non adatto - adatto □ molto adatto ■

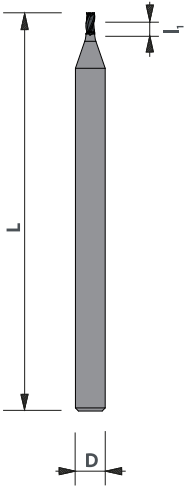

Art. n°	d1	Passo	D	L	Z
41520d0.20	0.20	0.40	3	38	2
41520d0.30	0.30	0.60	3	38	2
41520d0.40	0.40	0.80	3	38	2
41520d0.50	0.50	1.00	3	38	3
41520d0.60	0.60	1.20	3	38	3
41520d0.70	0.70	1.40	3	38	3
41520d0.80	0.80	1.60	3	38	3
41520d0.90	0.90	1.80	3	38	3
41520d1.00	1.00	2.00	3	38	3
41520d1.10	1.10	2.20	3	38	3
41520d1.20	1.20	2.40	3	38	3
41520d1.30	1.30	2.60	3	38	3
41520d1.40	1.40	2.80	3	38	3
41520d1.50	1.50	3.00	3	38	3

Brut uniquement
Raw only - Nur rohe
Solo grezzo

PCD

Z2-3

γ 8-10° λ 30°

ap ae

ap=0.15xd1 ae=0.03xd1
ap=1xd1

