


PKD Gravierfräser für 701S Maschine Willemin-Macodel

74119-3


Werkstoffe	n [tr/min]	Ap	Perf.
Stahl < 700 N/mm ²	-	-	-
Stahl > 700 N/mm ²	-	-	-
Nichtrostende Stähle	-	-	-
Gusseisen	-	-	-
Kupfer	≥ 40'000	0.05 - 0.40	□
Messing - Bronze	≥ 40'000	0.05 - 0.40	□
Aluminium	≥ 40'000	0.05 - 0.40	■
Gold - Silber	≥ 40'000	0.05 - 0.40	■
Platin - Palladium	≥ 40'000	0.05 - 0.40	■
Superlegierungen	-	-	-
Titan	-	-	-

nicht geeignet - geeignet □ sehr geeignet ■

Toleranzen d_i: +/- 0.01
D: h5

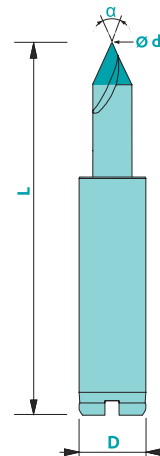

Art. n°	α	d _i	D	L
74119-3a40d0.05	40	0.05	6	33
74119-3a40d0.08	40	0.08	6	33
74119-3a40d0.10	40	0.10	6	33
74119-3a50d0.05	50	0.05	6	33
74119-3a50d0.08	50	0.08	6	33
74119-3a50d0.10	50	0.10	6	33
74119-3a60d0.05	60	0.05	6	33
74119-3a60d0.08	60	0.08	6	33
74119-3a60d0.10	60	0.10	6	33
74119-3a70d0.05	70	0.05	6	33
74119-3a70d0.08	70	0.08	6	33
74119-3a70d0.10	70	0.10	6	33
74119-3a90d0.05	90	0.05	6	33
74119-3a90d0.08	90	0.08	6	33
74119-3a90d0.10	90	0.10	6	33

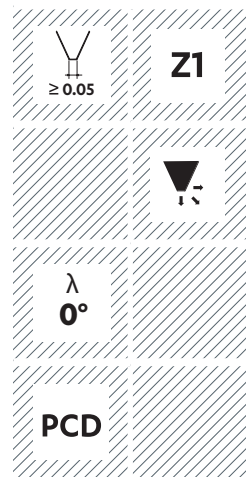

☐ Bestellung ☐ Angebotsanfrage

Winkel (α): ☐ Standardmäßig: 60° ☐ 30° ☐ 35° ☐ 45° ☐ Andere : _____ ☐ 50° ☐ 55° ☐ 90°		Bestellungs-Nr. : _____
Werkstoffe zum spanen: _____	Menge : _____	d_i (ab 0.02mm) : _____
Kontakt Person : _____		Stempel des Unternehmens & Datum : _____

Standarddimension vom Stab : Ø 3x L 38, Ø 4x L 38, Ø 6x L 38, Ø 6x L 51, Ø 8x L 61, Ø 10x L 72, Ø 12x L 83, Ø 16x L 92, Ø 20x L 104

Andere Dimensionen, CVD/CBN auf Anfrage