


Engraving mill in PCD for 701S machine Willemin-Macodel

74119-3


Material	n [rpm]	Ap	Perf.
Steel < 700 N/mm²	-	-	-
Steel > 700 N/mm²	-	-	-
Stainless steel	-	-	-
Cast iron	-	-	-
Copper	≥ 40'000	0.05 - 0.40	□
Brass - Bronze	≥ 40'000	0.05 - 0.40	□
Aluminium	≥ 40'000	0.05 - 0.40	■
Gold - Silver	≥ 40'000	0.05 - 0.40	■
Platinum - Palladium	≥ 40'000	0.05 - 0.40	■
Superalloys	-	-	-
Titanium	-	-	-

not adapted - adapted □ highly adapted ■

Tolerances d_1 : +/- 0.01
D: h5

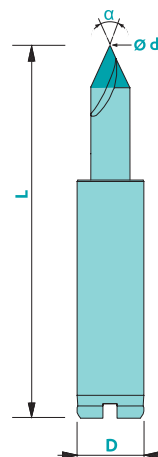

Art. n°	α	d_1	D	L
74119-3a40d0.05	40	0.05	6	33
74119-3a40d0.08	40	0.08	6	33
74119-3a40d0.10	40	0.10	6	33
74119-3a50d0.05	50	0.05	6	33
74119-3a50d0.08	50	0.08	6	33
74119-3a50d0.10	50	0.10	6	33
74119-3a60d0.05	60	0.05	6	33
74119-3a60d0.08	60	0.08	6	33
74119-3a60d0.10	60	0.10	6	33
74119-3a70d0.05	70	0.05	6	33
74119-3a70d0.08	70	0.08	6	33
74119-3a70d0.10	70	0.10	6	33
74119-3a90d0.05	90	0.05	6	33
74119-3a90d0.08	90	0.08	6	33
74119-3a90d0.10	90	0.10	6	33

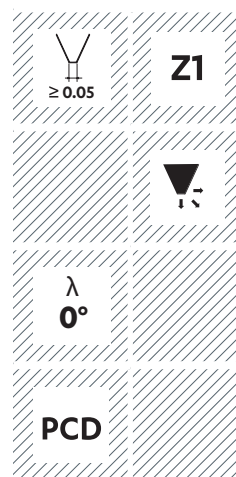

☐ Order ☐ Quotation request

Angle (α): ☐ By default : 60° ☐ 30° ☐ 35° ☐ 45° ☐ Other : _____ ☐ 50° ☐ 55° ☐ 90°		Order No : _____
Machined material : _____	Quantity : _____	d_1 (from 0.02 mm) : _____
Contact person : _____		Company's stamp & date : _____

Standard dimensions of the bars : $\varnothing$ 3x L 38, $\varnothing$ 4x L 38, $\varnothing$ 6x L 38, $\varnothing$ 6x L 51, $\varnothing$ 8x L 61, $\varnothing$ 10x L 72, $\varnothing$ 12x L 83, $\varnothing$ 16x L 92, $\varnothing$ 20x L 104

Other dimensions, CVD/CBN available upon request.